

ျိုဳ ୬୦ಡಿಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024 Notice Inviting Tender

FURNISHING WORKS IN EXISTING PREMISES OF SOUNDATTI RAIBAG BRANCH (CHIKODI RO)

Location of the Branch/Office	Canara Bank, SOUNDATTI RAIBAG Branch
Eligibility of the contractor	Eligible Furnishing Contractors Empanelled With Circle Office: Hubballi
EMD	Exempted for Contractors Empanelled With Circle Office: Hubballi
Address for submission of sealed tenders	Circle Office: Hubballi
Last date & time for submission of sealed tenders	18.07.2024 up to 3:30 pm
Date & Time of opening of sealed tenders	18.07.2024 up to 4:00 pm
Payment terms	As per IBA norms.
Time limit for execution of work	30 days from the date of work order
Defect liability period	12 months after completion of work
Retention money towards defect liability period	3 % of final bill amount
Date of commencement of work	As per work order
Income Tax &/ other taxes	At applicable rate
Payment	After the completion of the work, as per procedure
Period for submitting final bill by	Within one month from the date of virtual completion of the
contractor	work
Liquidated damage for non	1% OF THE TENDERED AMOUNT per week and part thereof
completion of work in time	for the delayed period maximum of 5%.
Rates quoted by bidder	 I. The quoted rate should be inclusive of Cost of materials, transport, loading, unloading charges, cost of installation, all taxes (excluding GST), wastages, machinery, temporary works such as scaffolding, cleaning, overheads, profit, statutory expenses, incidental charges and all related expenses required for the completion of the work. II. Additional claims other than the quoted amount will not be entertained. III. The quoted rates shall be firm throughout the completion of the project
Insurance	Falls under scope of contractor.
Validity of submitted tender	90 days from the opening of tenders

The sealed tender must be dropped in tender box kept at the Circle Office within the above stipulated time. Tenderer / authorized representative are requested to be present at the time of opening. Canara Bank will not be bound to accept the lowest tender & reserves the right to reject any or all the tenders without assigning any reason thereof.



ျိုး ၿဝေးမေး सिडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

To

The Assistant General Manager, P & E Section, Canara Bank Circle Office, BAGALKOT - 580030.

Dear Sir,

Sub: Furnishing works in the premises of SOUNDATTI RAIBAG Branch.

I/We hereby declare that I/ We have carefully gone through the conditions laid down in the Notice Inviting Tender, General notes, General Conditions of Contract, Special conditions, Schedule of approximate quantities and rates, Form of Agreement, General Specification, Approved manufacturers/natural source of materials Technical Specifications of schedule of quantities, and clearly understood all the same and on the basis of the same I/ We have quoted our rates in the Schedule of Quantities (i.e. BOQ) attached with the tender documents.
I / We have enclosed herewith a Demand Draft ofBank & No datedfavoring Premises & Estate Section, Circle Office, Canara Bank, Hubballi for ₹payable at Hubballi, towards E.M.D.
In the event of this Tender being accepted I/ We agree to enter into the agreement and submit the declaration on requisite non-judicial stamp papers as and when required and execute the contract according to your form of Agreement etc., in default whereof, I/ We do hereby bind my-self / ourselves to forfeit the aforesaid deposit.
I / We further agree to complete the work included in the said schedule of quantities within specified time from the date of the work order issued to commence the same.
I / We agree to pay all taxes(except GST), insurance charges as prevailing from time to time, on such items for whom same is to be levied by/ for the government, and the rates quoted by me / us are inclusive of all the same.
Once again knowing full well the contents of this tender, I / We sign this tender on thisDay of month of 2023.
Signature of the Contractor with seal & date

ျိဳ ಸಿಂಡಿಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

SPECIAL CONDITIONS & INSTRUCTIONS FOR THE GUIDANCE OF TENDERER

- 1. The works at the branch/Office premises need to be executed duly taking care of the local bye laws/regulations of the local authorities like Police Dept, Water supply and Sanitary Board, Electricity Board, Central/ State Labor Commission etc. Necessary permissions, licenses, temporary connections if needed shall be obtained by the Contractor and Bank shall not be held responsible for any lapses.
- **2.** The works shall be executed duly taking care of all safety measures and Bank shall be fully indemnified for any 3rd party claims, casualties, mishaps, loss of property etc. related to the undertaking & the execution of the subject work.
- **3.** GST TAXES: As per the new Goods & Services Tax (GST) structure, the tenderer are required to have GSTIN number & Tenderer without GSTIN number are not eligible to participate in the tender process. The details as per the Annexure I attached are to be mandatorily furnished along with the tender. The eligible tenderer are requested to quote the GST separately. The taxes will be deducted at source as per the statutory requirements. While raising the bill, it shall be mentioned as bill to Canara Bank and our Bank's GSTIN number to be mentioned.
- 4. CANARA BANK'S KARNATAKA STATE GSTIN NUMBER is 29AAACC6106GIZX.
- **5.** Tenderer are requested to submit the EMD in the form of crossed Demand draft only on any of the nationalized Banks/State Bank Drawn in favor of Premises & Estate Section, Circle Office, Canara Bank, BAGALKOT, payable at BAGALKOT. Tender with EMD in any other forms shall be rejected.
- **6.** Tenderer are expected to visit the site before quoting the rates and should satisfy themselves as to the nature and conditions of work facilities available etc.
- **7.** The tenderer are required to examine the enclosed general plan, tender form and conditions mentioned in the tender.
- **8.** The tenderer should quote the rates in the figures. The amount for each item should be worked out and the requisite totals shall be given. The total amount shall be written both in figures and words.
- **9.** The rates quoted in the tender shall be for measured finished works and shall include all changes including cost of materials, transportation, freight charges etc. complete.
- **10.** The work is to be completed within stipulated time.
- **11.** The successful tenderer shall give all necessary personal attention to the work during the process of work and also until the expiry date of "Defects Liability Periods" which is <u>12 months</u> after the date of completion of the work.
- **12.** The bank reserves the right to reject any portion of the work or material, which is, found unsatisfactory not up to the standard.

ม่อดิฮ์เย सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

- **13.** A retention amount of 3% of the bill amount will be retained from the final bill and shall be paid to the successful tenderer after the defects liability period is over and upon the certification of the engineer.
- **14.** Income tax deduction at prevailing / appropriate rates will be retained from each running bill which will be certified by the income tax authorities and a receipt will be given to the contractors.

CONDITIONS OF CONTRACT

- **1.** If any additions and alterations are found necessary, the tenderer will have to do the same within the tendered rates with the prior approval of the bank.
- **2.** The contractor shall employ adequate labor to complete the work within the scheduled time and shall make his own arrangements for housing his materials etc.
- **3.** The contactor shall have to make his own arrangements to house his labor and staff for their services.
- **4.** All tendered rates shall include for the cost of materials, labor, supervision, tools, plant, transportation, contingencies, duties, breakages, wastages, sundries, scaffolding, etc complete.
- **5.** All instruction regarding the execution of the work shall be received from the officials through consultant/architect only. Any other instructions issued directly to the contractor by anyone else shall not be binding on the bank.
- **6.** The bank shall have the power to omit or cancel any item of work without assigning any reason whatsoever and no claim for compensation for damage will be entertained for such omissions and cancellation.
- **7.** The contactor shall maintain satisfactory progress of work as well as maintain a desired level of workmanship. If in the opinion of the bank the progress is unsatisfactory and / or the workmanship is unsatisfactory then the bank shall take possession of the work within 7 days to that effect. The bank shall then complete the entire work and rectify all the defects at the contractor's cost and consequences.
- **8.** In case the bank is not satisfied with the quality of materials used by the contractors, they reserve the right to direct the contractor to procure such materials supplied from agencies they deem fit.
- **9.** The contactors is to be responsible for clearing any, all dirt and rubbish and superfluous materials as they accumulate and everything unnecessary and to leave the premises in a clean and orderly condition on completion and fit for occupation. No extra payment shall be made for doing this.
- **10.** Any work which is not approved by the bank shall have to be removed within 24 hours from the time of order and shall have to be redone by the contactor at his own cost and this cost will be borne by the contractor.
- **11.** No deviation whatsoever for any reason will be permitted, however, if any deviation becomes necessary, the same should be brought to the immediate notice of the bank and written approval must be obtained for such deviation before proceeding with the execution of work.



มงผิಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

- **12.** The bank has got the right to supply any materials required for the work and cost of materials so supplied will be deducted from the bills of the successful contractor.
- **13.** The contactor shall be responsible for safe custody of his materials/materials issued to him by the bank till they are used for the work. He shall make his own arrangements for the safe custody and proper storage and preservation in sound condition till the same are actually used in the work.
- **14.** The tenderer shall extended full co-operation to the other contactor /agencies like electrical, air conditioning, Fire & CCTV, LAN etc who are also working for the same project and co-ordinate with them in finishing the awarded work within the stipulated time given.
- **15.** The contactor shall have a competent supervisor on the site for all the time.
- **16.** For any new item the rate will be fixed by the bank as per prevailing fair market rate and labor which will be binding on the contactor.
- **17.** In case the brand of materials mentioned in the tender is not available in the market, the alternate brand shall be used only after prior written approval of the bank.
- **18.** The contactor shall be given a single electrical connection at work site. Electrical charges for consumption by the contactor will be charged separately by the bank, contractors have to provide sub-meter.
- **19.** The successful tenderer shall not anticipate any financial help from the bank in the form of adhoc payment / advance for mobilizing and for starting the work.
- **20.** The contractor should strictly adhere to the specifications and make of the materials, mentioned in the annexure. Any deviation will summarily reject the items of the work and not qualify for payment.
- **21.** The successful tenderer shall be ready to carry out works between non banking hours and even at nights and holidays. The contractor should sign all the pages of the document and the same shall be submitted to us.

Acceptance of contractor for Labor laws

- > The successful tenderer / Contractor shall carefully and diligently implement the provisions of the Contract Labor Act & Contract Labor Rules.
- ➤ The Bank shall be entitled to deduct from the Contract Consideration, any such amount which the Bank has to pay in accordance with the Contract Labor (Regulation & Abolition) Act 1971 and Workmen's Compensation Act, in the event of the Bank having to disburse compensation / effect any payment under the Contract Labor Acts / Rules.
- ➤ Please note that as per rule 81(1) of Contract Labor (R&A) Rules, 1971, it is mandatory on the part of the Contractor to the display the notice containing the following details at prominent place at the work site.
 - a) Rates of wages.
 - b) Hours of work.

Signature of Bidder with seal Page **5** of **20**

ျိဳ ୬୦ಡಿಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPI:10548: 2024-25 dated 09.07.2024

- c) Wage periods.
- d) Dates of payment of wages.
- e) Names & addresses of the Labor Inspectors having jurisdiction &
- f) Date of payment of unpaid wages.

The notice containing the above details shall be displayed without fail at the work site.

- 1. The Contractor shall not engage any workmen for wages, less than the minimum wages prescribed under the notification issued by the Central Government.
- 2. The contractor should follow all labor laws/guidelines laid down by central /state government from time to time.
- 3. ABNORMALLY HIGH AND LOW RATED ITEMS:

For item rate tenders if, the rates quoted by the lowest bidder for certain items of the Bill of Quantities of the tender are found to be abnormally high or low in comparison to the market rate analysis of the item done by the Architects/Bank and or in comparison to Architect/Bank's method of working out market rate justification for the items, the same shall be governed as under in order to avoid financial loss to the Bank in the event of default of Bidders.

- i. For abnormally high rated items (AHR), the progressive payment shall be 80% (eighty percent) of the payment due to the Bidder against execution of the AHR item. The balance withheld 20% payment shall be released after 75% of total value of the original contract is complete in financial terms or this 20% withheld payment can be released to the Bidder on submission of an unconditional bank guarantee of equivalent amount in the proforma of Bank. Further deviation limit for AHR items shall be nil on plus side and Bank reserves the right to restrict, substitute or not execute the AHR items during execution. The decision of the Architect/Bank's Engineer in this regard shall be final and binding on the Bidder.
- ii. For abnormally low rated (ALR) items the Bidder shall submit Bank Guarantee of difference in total of amount of ALR item(s) and the total amount of corresponding items at market rate of the Architect/Bank. This bank guarantee shall be valid till completion of the project. In exceptional circumstances, the amount of Bank Guarantees (BG) may be reduced or BG released earlier than completion period if, in view of Architect/Bank's Engineer, all ALR items as provided in the contract are executed as per terms of contract and/or not required to be executed.

Notwithstanding what is contained in Para i) & ii) above, the provisions of Para (i)and (ii) shall not be applicable on tenders invited on percentage rate basis.

The decision of the Bank on identification/ marking of AHR and ALR item are final and binding on the Bidder. In case the Bidder do not agree for furnishing of Bank Guarantee as above towards ALR items, at the time of award of works, the EMD/Performance guarantee of the Bidder shall be forfeited and decision of Architect in this regard shall be final and binding on the Bidder.

<u>CERTIFICATE</u>

I / WE HAVE READ, FULLY UNDERSTOOD THE ABOVE MENTIONED REGULATIONS OF LABOUR LAWS/GUIDELINES AND ACCEPT THE SAME IN TOTO. I ALSO UNDERTAKE TO FOLLOW ALL LABOUR LAWS/GUIDELINES LAID DOWN BY CENTRAL /STATE GOVERNMENT FROM TIME TO TIME & INDEMNIFY THE BANK AUTHORITIES.

Signature of Bidder with seal Page 6 of 20



ျိုး ၿဝေးမေး सिडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

ANNEXURE I (TO BE MANDATORILY FURNISHED)

1.	Name of the Contractor under the Contract Labor	
	(Regulation and Abolition) Act, 1970 (37 of 1970)	
	(if applicable)	
2.	LIN / PAN No	
3.	Email Id	
4.	Mobile No.	
5.	No. & date of Certificate of Registration/ License*	
6.	Name of Person in charge of work	
7.	LIN / PAN No. of the person in charge of work	
8.	Email Id of the person in charge of work	
9.	Mobile No. of the person in charge of work	

^{*} Please strike off whichever is not applicable

APPROVED LIST OF MATERIALS

	Mond. All wond mount he well as	Calvus ad / Thalisus ad (immorated)
	Wood: All wood must be well seasoned,	Sal wood/ Thali wood (imported)
	free from knots, other defects, decay and	
1	defects due to handling and	
	transportation. Wherever necessary	
	provide with anti termite treatment.	
2	Teak Wood	Old Burma Teak
3	Marine grade plywood (BWF PF	ISI marked, complying to BIS specifications
3	bounded)	UNIPLY/ KITPLY/ CENTURY PLY/ ARCHID PLY
4	MR grade commercial plywood	ISI marked, complying to BIS specifications
4	4mm/6mm/12mm/ 19mm/25mm sizes.	UNIPLY/ KITPLY/ CENTURY PLY/ ARCHID PLY
5	Veneers	Anchor/Green Ply / Century / Euro
	Laminate: Design , shade, finish as per	Decolote- formica/ Marino/ mica
6	Architect's Selection confirming to IS:	Greenlam / Meriono / Euro
	2046	,
7	Powder coated track, ceiling	Interarch, Vista – levotor, Luxalon
8	Hinges, tower bolts, handles	Brass oxidized/ epoxy powder coated (heavy
8		duty)
9	Glass, Float Glass	Saint-Gobain / Modiguard / Asahi
10	Adhesive materials	Fevicol (pidilite make)
	Powder coated aluminum partitions	Jindal / Indal / Hindal
44	(15.20 micron two step electrical color	(Heavy Gauge 1.2 mm th, 15.20 micron 2 Step
11	process using polyester powder)	thick electrical color process Using polyester
		powder)
12	Pre laminated boards confirming to IS :	Novopon /Eco board (Exterior grade only)
12	12823: 1990	1 ,
12	Floor springs confirming to IS: 6315 /	OZONE/ HAFELE/EBCO
13	door closure confirming to IS: 3564	·
14	Fixtures	All hardware fittings & fixture are to be powder



NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024


		coated. Color, finish as per Bank 's specification,
		Godrej makes.
15	Melamine Polish	Asian Paint / ICI / Nerolac
16	External Emulsion (Anti-flasking, Anti-	Asian (Ace)/ Nerolac/ Berger/Dulux
10	fungal)	Sample to be approved by the Architect.
17	Oil Bound Distemper	Asian / Nerolac/Berger/Dulux
17		Sample to be approved by the Architect.
18	Synthetic Enamel Paint	Asian /Nerolac/Berger/Dulux.
10		Sample to be approved by the Architect.
19	Automobile Duco paint	MRF / ICI / Asian
20	Carpet Tiles	Nylon carpet tile -shaw/Milliken/Bentley prince
21	Cement	ACC, UltraTech, Ambuja – 43 grade
22	Bricks	Burnt bricks with minimum strength of 35KG/Cm ²
23	Hinges / drawers	Earl-Bihari Pvt Ltd, Godrej
24	Steel	HYSD bars with FE-415 grade
25	Vitrified tiles	Naveen / RAK / Nitco / Kajaria
26	Ceramic Tiles	H & R Johnson/Bell/Kajaria/Naveen /Spartek.
27	Glazed Tiles	H & R Johnson/Bell/Kajaria /Spartek/ Naveen
28	Tiles fixing adhesive	Algitile / Balgrout.
29	False Ceiling tiles	Armstrong or equivalent only
30	Italian Marble	Classic / Nitco / Elegance
31	Vertical / roller blinds	Hunter Douglas, Mac, Vista, Technifab
32	Wall paper	Marshall / ego / softek
33	Glass film	GARWARE OR EQUIVALENT
34	Drawers / cupboards Locks	Godrej / Yale / Haffele / Dorma Laxmi Make
35	Door Locks	SS finished Mortise lock of Laxmi make
36	PVC Pipes	Finolex /Prince
37	M.S.Pipes	Tata
38	Sanitary Ware	Parry ware /Hindustan sanitary
39	Granite slab 20 mm thick	Edges shall be rounded. Beveled.
40	Vinyl flooring (2mm thick)	Royal House
41	Door closure	Everite/ Godrej/ Hafele
42	Steel	Kamadhenu


Note: Samples are to be approved by Bank and Architect if any. Any brands indicated under the items specifications in the Bill of quantities will prevail over the above indicated makes.



ျိဳ ಸಿಂಡಿಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

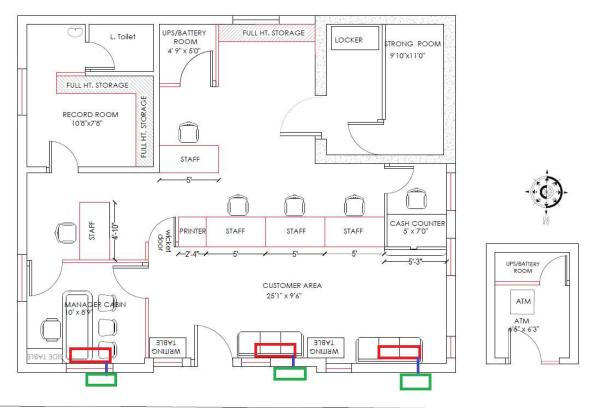

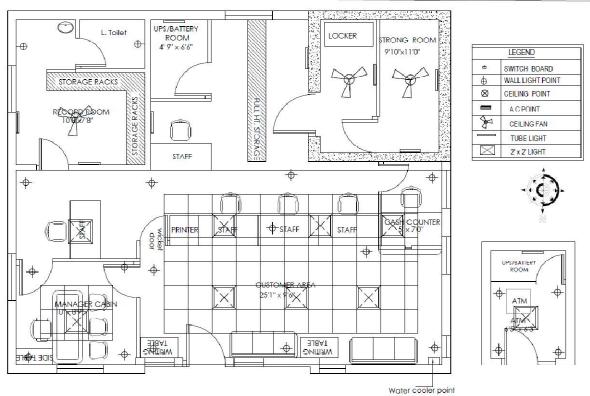

Signature of Bidder with seal

Page **9** of **20**

ျိုဳ ୬୦ಡಿಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

SLNO	DESCRIPTION OF ITEM OF WORKS	QTY	UNIT	RATE	AMOUNT
1	Full height partly glazed/solid Partitions. (for Manager cabin/ ups/ filing/ record room and such other areas)				
	Providing & fixing Full height partition using using 2"x2" size seasoned hard wood sections of approved species for all horizontals and verticals spaced at 2 feet c/c or part there-of, both ways for supporting frame work. All the panels and on both sides of the partition to be covered with 6mm thick commercial grade plywood and over that 1mm thick laminate of approved colour and brand to be pasted. Necessary openings must be made in the frame sections to run the wires, computer cables wherever necessary. Similarly necessary cuttings to be made in the partition to fix switch boxes of electrical, telephone sockets, computer Information outlets etc. (Inside partition of the UPS room shall be covered with asbestos sheet upon plywood to make it fireproof same is applicable for its door.				
a	With all the panels including central panel of the partition (between 3 feet to 7 feet level) shall be covered with 6 mm thick MR grade commercial plywood & laminate finish.	290	SFT		
b	Same as item 1 a but the central panel of the partition above 3 feet to 7 feet level shall be covered with 6 mm thick plain glasss instead of plywood & laminate finish.	75	SFT		
C.	Providing & fixing 12mm thk toughned glass partition 7' height, including all necessary fittings, material, labour, glass etching work as per banks specifications.etc complete(Manager Cabin front side partition only)	35	SFT		
3	CASH CABIN FRONT PARTITION (refer drawing)				
	Providing and fixing partition for cash cabin front by using 2.5"x2.5" size well seasoned hard wood sections of first class quality for all horizontals and verticals. The exposed surface of wood shall be finished with 1mm thick lamination of approved colour. There shall be atleast three horizontals at 0'0', 0'8" and 3'3" levels [approx] from the customer counter top level (which will be at 42 inches height from floor level).				
	There shall be vertical supports on two ends of the cash counter upto 7 ft height from customer top level. The bottom 0'8" height panel to be covered by 7.5 mm thick 56mm x 47mm opening aluminium grill (AL 101) fixed with suitable corner beadings, rubber beadings. At the mid portion of the panel there shall be an opening of 6" x 6" with alround frame work & this opening shall have a sliding or openable type shutter with locking arrangement from inside to facilitate cash receiving/ paying. The top panel shall be covered by two glass panels made of 12 mm thick plain glass fixed with necessary beedings with an intermediate horizontal gap between two glass panels to facilitate communication between custmer and cashier.	40	SFT		

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

	The glass panel shall have designed a\rtistic etching using frosted film.			
4	CASH CABIN SIDE & REAR PARTITION			
	Providing and fixing partitions for cash cabin sides & rear areas by using 2.5"x2.5" size well seasoned hard wood sections of first class quality for all horizontals and verticals spaced at required intervals but not more than 3 feet c/c unless otherwise specified. There shall be atleast 4 horizontal wood sections at 0" 0', 2'0", 3'6" and 7'0" levels [approx] from the floor level. There shall be vertical supports for every 3 feet interval or part thereof. The bottom 3'6" height panel to be covered by 6mm thick commercial plywood on both sides and finished with 1mm thick lamination. The top remaining panels shall be covered by 7.5 mm thick 56mm x 47mm opening aluminium grill (AL 101) fixed with suitable corner beadings, rubber beadings. There shall be a horizontal tray at 3 ft level to facilitate slips movement and communication between superviser and cashier. The top panel Above Counter shall be covered by glass panels made of 12 mm thick plain glass fixed with necessary beedings. The approximate size of the Bulk Cash Cabin is 5'0" (width) x 7'6" (length) x 7'0" (height).	40	SFT	
5	WOOD FRAMED LAMINATED DOOR FOR BULK CASH CABINS			
	Providing and fixing of wood framed door of size 7 feet x 2'6" wide [approx] using 3" x 2" well seasoned hard wood sections for the top, bottom and verticles, 5" x 2" for the middle lock rail. All sectional dimensions are minimum. The bottom 3 feet height panel to be covered by 6mm thick Commercial plywood on both sides & finished with approved clour 1 mm thick laminate. The top 3 feet panel to be covered with 6mm thick plain glass, using necessary moulded corner Teak / beach wood beadings. The edges of the shutter shall be lipped with 6mm thick Teak / beach wood beedings. The door shutter shall be fixed with 3 nos stainless steel (SS) make 5" size hinges, one number 6 levered Godrej make (with minimum 3 keys) automatic NIGHT LATCH fixed just below 3 feet level and one 3" long SS material tower bolt and 4" long SS material handles on both the sides. All the exposed wood shall be neatly finished with 2 coats of polish & stained to required colour.	1	NOS	
6	ALUMINIUM GRILL FOR CASH CABIN TOP			
	Providing & fixing 7.5mm thick 56mm x 47mm aluminium grill (AL 101) at the top of the cash cabin with necessary hard wood beading. All the accessories used shall be concealed type. All the aluminium sections shall be powder coated.	45	SFT	
7	SINGLE WINDOW CASH COUNTER (SWC) / TELLER CASH TABLE			

🖟 ୬୦ಡಿಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

ı	•	J uateu	09.07.	LUL T	1	1
	Providing and fixing SWS cash Counter as shown in the Drawing. Each Individual counter shall have overall size of 2' 6" (W) x 5' 0" (L) x 2' 6" (H) working top with customer transaction top at an height of 42" & the SWS working counter top at 30" height from floor level. The customer transaction top shall have a customer ledge of width 6" (towards customer side) made of 19 mm thick block board with1 mm thick laminate finish & a 12" width ledge towards cashier side, portion of which say 9 inches wide for the full length of 5 feet shall be made of 12 mm thick clear glass (all average dimensions) all as shown in the drawing. The front, working top, customer top, main vertical side support shall be made out of 19 mm thick commercial ply wood & finished with 1mm thick lamiantion on all visible sides. A foot rest of 3" x 2" hardwood section with proper painting finish shall be provided. The counter and the drawers shall be made by using 19mm commercial block board except for draw bottom which shall be provided with 12 mm commercial plywood. The inside & hidden surfaces to be polished to the required colour with 2 coats of colourless french polish. The front elevation of the counter shall be as per the design detailed in the drawing or as detailed by the Architect/ Engineer in-charge using 6mm thick wooden/MDF beadings to provide recession & 1mm thick	1	NOS	2024		
	wooden/MDF beadings to provide recession & 1mm thick laminate. The laminate colours for the counter/ table top, vertical sides, bands, skirting etc shall be strictly as per the recommended colours indicated by Bank. There shall be a round hole of 2'6" size at the required location for wire management. For Main Cash Counter					
8	FRONT OFFICE CUSTOMER COUNTER					\exists
a	Providing and fixing Running customer counter of total height 30" and working top width of 30" width (all minimum dimensions) all as per drawing with front, working top, main vertical support upto the working top at every 5ft c/c and intermediate vertical support for draw unit upto working top. The working top shall be at a height of 30". There shall be two drawers of size 13.5"x 22"x 5" (internal dimensions) fixed in between the intermediate support and main support at every 5ft c/c. The portion below the drawers shall have a cupboard with front shutter. The counter and the drawers shall be made by using 19mm thick commercial block board except for draw bottom which shall be provided with 12 mm commercial plywood. The front elevation of the counter shall be as per the design detailed in the drawing using 6mm thick design teak wood/ MDF material to provide recession and finished with 1mm laminate. The customer top, working top, customer front & front face of shutter and draw shall be finished with 1 mm thick lamination.					

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

1	The customer hand shall have a surred profile as pay the	J uateu		202 4	I
1	The customer hood shall have a curved profile as per the				
1	drawing. For every seating area (normally 4'6" to 5 feet				
	length) there shall be a key board tray of minimum 21" x				
	9" size made of 19mm block board with both side				
	laminated and fixed with telescopic type metal channels				
	fixed on the lower side of the counter/table top, a foot				
	rest made of 3" x 2" hardwood section with proper				
	painting finish. The drawers movement shall be with				
	sliding arrangement with readymade TELESCOPIC metal	10	RFT		
	slides and metal rollers. All the exposed edges shall be	10	Kii		
	provided with teak wood beadings of size 1" x 1/4"				
	POLISHED. The inside & hidden surfaces to be polished to				
	the required colour with 2 coats of colourless french				
	polish. Each drawer/cupboard shall have one				
	multipurpose concealed lock and 3" long brass or				
	stainless steel handle. Necessary openings for the				
	access of the wires with plug shall be provided with PVC				
1	caps for the counter top at appropriate location.				
9	WORK STATION / EXECUTIVE/SM/ MANAGER TABLES				
	Providing and fixing TABLE of length 78", height 30" and				
	top width 36" all minimum dimensions with front,				
	working top and side supports. There shall be three				
	draws of size 13.5"x 22"x 5" fixed in a alround boxing				
	with top and one of the side of the table as common				
	top and side. All by using 19mm commercial Block				
	board except for draw bottom which shall be provided				
	with 6mm commercial plywood . The front elevation of				
	the table shall be as per the design detailed in the				
	drawing using 6mm thick MDF to provide recession and				
	finished with TW beadings ,1mm laminate. The working				
	top, sides, front face of draw shall be finished with 1				
	mm thick lamination. The working top shall be provided				
	with 10mm thick clear glass edges biveled.				
	There shall be shelf of size 10" x 20" below the working				
	top for CPU UNIT using 19mm commercial block board as				
	shown in the drawing. There shall be shelf of size 36" x 20"				
	below the working top for CC camera CPU. A foot rest of				
	3" x 1 1/2" hardwood section shall be provided. The draws				
	shall have sliding arrangement by using readymade metal				
1	rollers in metal channel. All the exposed edges shall be				
1					
1	provided with teak wood beadings of size 1" x 1/4"				
1	POLISHED. All non laminated exposed surfaces shall be				
	provided with two coats of enamel paint over a coat of				
	primer. Each draw shall have stainless steel handle with a				
	centralized locking system for the three draw unit.				
	Necessary openings for the access of the wires with plug				
	shall be provided inclusive of working top and covered				
	with PVC caps as per Drawing.	0	NOC		
a	C Manager Table of 3' 0" (W) x 6'6" (L) x 2' 6" (H)	0	NOS		
Ь	S Manager Table of 3' 0" (W) x 6' 0" (L) x 2' 6" (H)	1	NOS		
С	Officer Table of 3' 0" (W) x 5' 0" (L) x 2' 6" (H)	0	NOS		

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

10	SIDE STORAGE UNITS			
a	Providing and fixing storage units of following sizes, with necessary swinging shutters, all made of 19mm thick commercial block board for sides, partitions, top, shelves, bottom, shutters. The exposed surfaces including rear surface shall be finished with 1mm thick lamination of approved shade & brand. Unit shall have internally one horizontal shelf and one vertical partition in the centre all made with 19mm thick commercial block board. All internal and hidden surfaces shall be finished with 2 coats of french polish stained with required colour. 12mm thick commercial plywood to be fixed for the rear surface cover with 1 mm thick lamination finish.			
b	All the exposed edges shall be lipped with 3/4"x1/2" matching Wood Beading & neatly polished with 2 coats with matching colour. Payable area is per unit of storage units of below mentioned sizes. The shutters shall have locking arrangement Brass 3" size handles, Ball catch, Continuous MS hinges, 3" PC Aluminium Tower bolts as per the requirement.			
i	Executive/SM/Manager's Table Side Unit 1'6"(W) x 3'6"(L) x 2'6"(H)	1	NOS	
ii	Teller Cash Side Table 1'6" (W) x 4'6" (L) x 2'6" (H)	1	NOS	
iii	Work Station Side Unit 1'6" (W) x 3'0"(L) x 2'6" (H)	0	NOS	
11	ENTRANCE DOOR			
	Providing and fixing fully glazed entrance door of double shutter width not exceeding 3'6" and as per the following specifications. For alround supporting door frame 5" x 3" section made out of 25mm thick commercial block board neatly finished with 1mm thick laminate of TW/beach wood colour and shall have necessary offset/recess area to fit door shutter thickness. Each shutter shall be fully glazed and shall be made of 12mm thick plain glass fixed in 5" x 2 ¼" TW wood or powder coated aluminium extruded sections at both top and bottom levels. The edges and sides of the glass shutters shall be neatly grinded & polished. There shall be 12mm wide double line frosted film pasted with etching like design alround the shutter and horizontal strips with bank emblem at the centre portion of the glass shutters. The TW sections shall be neatly polished with two coats of wood polish & stained to the required colour. Each shutter shall be fixed firmly with necessary pivot hinges at the top and a floor spring of OZONE make at the bottom (cost of floor spring will be paid separately)\. The shutters shall have decorative stainless steel material handles of minimum 9" length on both sides of the shutter. The normal width of the entrance will be 5'0" and design shll be as per the instructions of the Architect / Bank. Shutter width shall not be more than 3 ft 6 inches. The quantity given is for 2 entrance doors.	42	SFT	

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

1 40	NII Rei. COHOB: F&E:DFJ:10546: 2024-2	dateu	0 7.0 7	2027	I
12	MAIN ENTRANCE DOOR SURROUNDING PARTITION				
	Providing and fixing fully glazed WOODEN PARTITION surrounding the entrance door/s as per the following specifications. Alround supporting frame work as well as intermediate frames as per the directions of the Engineer in charge, shall be made out of 5" x 3" section prepared using 25mm thick commercial plywood neatly finished with 1mm thick laminate of TW/beach wood colour. The panels above 7ft level shall be finsihed with 6mm thick commercial plywood and 1mm thick laminate on both sides. Panels below 7 ft shall be covered with 6 mm thick plain glass fixed with corner wood beadings. For certain panels, even below the 7 ft level opaque finish as above would be required depending on the site condition. The glass panes to be covered with approved design frosted film.	40	SFT		
13	FLOOR SPRING				
	Providing & Fixing floor spring of OZONE make at the bottom of the main entrance door.	2	NOS		
14	ROLLER BLINDS				
	Providing and fixing of Luxaflex (of Hunter Douglas) / MAC make or equivalent brand window VERTICAL blinds. The top rail shall be made of powder coated aluminium section with best quality sliding arrangement.	180	SFT		
15	NEW WALL/ COLUMN PANELLING				
	Providing & fixing wall panelling using 8 mm thick MR grade commercial plywood fixed over a 2 ft x 2 ft grid made of 2" x 2" frame work. The frame work shall be made out of 25mm thick commercial plywood to get required sizes. Over the frame work 12 mm thick commercial plywood to be fixed and covering the same with 1.0 mm thick laminate of approved brand and shade and as per the design. At certain locations, space for soft board/pin up boards fixing, paintings area to be prepared with alround matching wooden beadings. The cost of such works shall also to be part of the item rate. Design will be decided during working along with premises incharg & Engineer.	40	SFT		
16	MINERAL FIBRE BOARD GRID TYPE FALSE CEILING				
	Providing, fabricating, erecting lay-in type tegular/ drop type Mineral fibre board false Ceiling of 600mm x 600mm grid as per the following specifications. The approved brands are ARMSTRONG/ NITTOBO / SAINT GOBAIN. The following specifications are the minimum and tenderers may quote for the equivalent or better specification. The grid system having 600mm x 600 mm or part thereof wherever necessary, shall be made using hot dipped galvanized steel section, exposed surface chemically cleaned capping prefinished in backed polyester paint, main Tee of size 14 x 38 x 0.33mm at every 1200mm c/c max and rotary stitched cross tee of size 14 x 38 x				

🖟 มoผิಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

	NIT Ref. COHUB: P&E:DPJ:10548: 2024- 2	25 dated	09.07.	2024	
	0.33mm at every 600mm c/c and cross Tee of size 14x 38				
	x 0.33mm at every 1200 c/c max and 14 x 22 x 0.457mm				
	wall angle alround the wall to form grid size of 600 x				
	600mm. The suspension system shall have 4mm dia pre-				
	straightened GI rods which are in-turn supported from				
	•				
	real ceiling using 6mm size anchor bolts, connected with				
	adjustable Hanger clips/ J bolts and other accessories as				
	per the manufacturers specifications. The T Sections				
	have a Galvanizing of 120 grams per M2 & passed through				
	for 500 hrs of Salt test. The tiles/ panels shall be of				
	prima Fine Fissured Microlook tegular of ARMSTRONG or				
	Fine Fissured High NRC(Narrow reveal) edge Tiles of Saint				
	Gobain Mineral Fibre Acoustic Ceiling Tiles of size 600 x				
	600 x 18 mm thick over the formed grid, in module size of				
	600mm x 600mm x 18mm Thick. The item shall include the				
	cost of additional Tee or L supports & other accessories				
	near the ends/ odd size edges/corners, making necessary				
	openings for electrical light fittings, fire alarm detectors				
	and any other fixtures.				
	No extra payement shall be made for making openings in				
	the panels/grid for the purpose of light fittings. Item rate				
	shall include all the taxes, transporation, erection,				
	loading & unloading and any other incidental expenditure				
	that may be required to be spent in completing the work	270	SFT		
	, , , , , , , , , , , , , , , , , , , ,	270	31 1		
	in totality as per above specifications. The tiles removed				
	to place light fittings shall be handed over to bank's				
	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light				
	to place light fittings shall be handed over to bank's				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate channel at 457mm centers. 12.5mm tapered edge				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate channel at 457mm centers. 12.5mm tapered edge Gypboard (Conforming to IS- 2095-1982) is then screwed				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate channel at 457mm centers. 12.5mm tapered edge Gypboard (Conforming to IS- 2095-1982) is then screwed fixed to ceiling section with 25mm dry wall screw at				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate channel at 457mm centers. 12.5mm tapered edge Gypboard (Conforming to IS- 2095-1982) is then screwed fixed to ceiling section with 25mm dry wall screw at 230mm centers. Screw fixing is done mechanically.				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate channel at 457mm centers. 12.5mm tapered edge Gypboard (Conforming to IS- 2095-1982) is then screwed fixed to ceiling section with 25mm dry wall screw at 230mm centers. Screw fixing is done mechanically. Finally the boards are to be jointed and finished so as to				
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate channel at 457mm centers. 12.5mm tapered edge Gypboard (Conforming to IS- 2095-1982) is then screwed fixed to ceiling section with 25mm dry wall screw at 230mm centers. Screw fixing is done mechanically.	420	CET		
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate channel at 457mm centers. 12.5mm tapered edge Gypboard (Conforming to IS- 2095-1982) is then screwed fixed to ceiling section with 25mm dry wall screw at 230mm centers. Screw fixing is done mechanically. Finally the boards are to be jointed and finished so as to	430	SFT		
17	to place light fittings shall be handed over to bank's custody and there may not be any deduction for light fittings area. GYPBOARD CEILING Providing and fixing suspended false ceiling, which includes providing and fixing GI perimeter channels of size 0.55mm thick having one flange of 20mm and another flange of 30mm and a web of 27mm along with perimeter of ceiling, screw fixed to brick wall/partition with the help of nylon sleeves and screws at 610mm centers. The suspending GI intermediate channel of size 45mm, 0.9mm thick with two flanges of 15mm each from the soffit at 1220mm centers with ceiling angle of width 25mmx 10mmx 0.55mm thick fixed to soffit with GI cleat and steel expansion fastene. Ceiling section of 0.55mm thickness having knurled web of 51.5mm and two flanges of 26mm each with lips of 10.5mm are then fixed to the intermediate channel with the help of connecting clips and in direction perpendicular to the intermediate channel at 457mm centers. 12.5mm tapered edge Gypboard (Conforming to IS- 2095-1982) is then screwed fixed to ceiling section with 25mm dry wall screw at 230mm centers. Screw fixing is done mechanically. Finally the boards are to be jointed and finished so as to have a flush look which includes filling as finishing the	430	SFT		

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

	for Gypboard (as equivalent) extra frame work for				
	electrical fittings, A/C diffusers, and/or any other cutout,				
	trap doors, wooden shadow battens (hollock wood black				
	enamel painted-25x40mm) at wall peripheries and ends,				
	12mm thick MDF board for pelmet etc. complete including				
	opening to be made for AC grills, light fittings, trap doors				
	etc. (The quoted rate shall be inclusive of suspenders at				
	all heights) (The rate to be quoted including plastic				
	emulsion paint)		 		
18	WOODEN SOLID CORE FLUSH DOORS FOR MANAGER CABIN,UPS,RECORD ROOM ETC				
	Providing & fixing wooden solid core flush shutters of 35				
	mm thickness with both side ply and alround wooden				
a	frame work. The top 4 feet portion shall be finished with				
	6mm thick plain glass fixed with wooden moulded				
	beadings & pasted with frosted film having Bank's logo and				
	strips as per the design provided by Engineer-in-charge.		 		
	The both sides of the shutter shall be finished with 1 mm thick approved colour & brand laminate. The alround				
	edges shall be with teak wood lipping beading. The door				
	sall be fixed to the partition frame work using 4 nos				
	stainless steel hinges, 2 nos 6" size S S handles, one 6	3	NOS		
	lever SS finished Mortice lock of Laxmi make, door closure		1103		
	of Everite make, door stopper. The payment is per				
	number of 3'x7' size. Any variation in size will be paid on				
	proportionate basis.				
	Providing & fixing 12mm thk toughned glass door of size				
	3'x7' to Manager cabin , including all nacessary fittings,		NOC		
b.	Door handles, Lock, glass etching work including all	1	NOS		
	materials, labours etc complete				
19	CUSTOMER WRITING DESK. New				
	Supplying and fixing free standing customer writing desk				
	of 36" length, 42" height and 18" deep with top, front,				
	side supports and foot rest. There shall be bins of size				
	6" x6" (front opening) for keeping challans at the top				
a	level, all made out of 19mm commercial block	2	NO		
	board. The top, front and side surfaces laminated with				
	1mm lamination and remaining surfaces neatly painted				
	with two coats of synthetic enamel paint over a coat of				
	primer. The top shall be provided with 10 mm clear glass edge bevelled fixed with 6 SS studs.				
20	SUGGESTION BOX				
20	Supplying and fixing Suggestion Box with front opening		 		
	with door & lock, slot for dropping letters from top, all				
	made out of 12mm commercial block board. The top,				
	front and side surfaces laminated with 1mm lamination		\ \.		
	and remaining surfaces neatly painted with two coats of	1	NO		
	synthetic enamel paint over a coat of primer . The				
	overall size shall be 8" x 10" x 12" (D X W X H).				
	, ,				
21	CHEQUE DROP BOX Supplying and fixing Cheque Drop Box with front opening				
1	I SUDDIVIDE SHE TIVING I ROCUO URON KOV WITH TRONT ORONING I	1	NO	i	i l

🖁 มิ๋oผิಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

I.	N11 Ref. COHUB: P&E:DPJ:10548: 2024-2	5 uateu	09.07.	4 044	1
	with door & lock, slot for dropping cheques from top, all				
	made out of 19mm commercial block board. The top, front and side surfaces laminated with 1mm lamination				
	and remaining surfaces neatly painted with two coats of				
	synthetic enamel paint over a coat of primer . The				
	overall size shall be 10" x 12" x 20" (D X W X H)				
22	RUNNING STORAGE CUPBOARDS (SWING SHUTTERS)				
	Providing and supplying running storage cupboards of				
	width 18" and height 36" or upto the specified height as per site conditions with top, sides, verticals, seperators (both horizontal and vertical) at every 3 ft. There shall be horizontals for every 15" height. The storage unit's verticals, horizontals & front swing shutters all shall be made by using 19mm commercial block board and only rear side covered by 12 mm commercial ply wood. The front shutters may be of size 18" to 21" width. There shall be skirting of height 2" to 3". All the vaisible surfaces like front, top and sides shall be finished with 1mm thick lamination. All the hidden, inside and non-laminated surfaces shall be finished with two coats of colourless polish stained to the required colour. There shall be one number of multi-purpose lock for every two shutters. Each shutter shall have a stainless steel handle, a brass ball catch/tower bolt 3" size as the case may be. The payment shall be based on the elevation area of	90	SFT		
	storage units provided.				
23	FRONT GLASS FOR COUNTERS				
	Providing and fixing 12mm thick plain glass of height varing between 1' 6" & 1' 0" for the front of the counters above the customer top. Tha verticaL supports shall be from the main side partition and fixed with 8mm thick beech wood beadings of necesary width. A opening of size 5" X 5" is to be provided in the 1'6" glass above the customer top for cash / slip transaction with necessary lockable glass shutter. There shall be 2"/3" gap between the glasses counter top for easy communication with the customer. The exposed edges of the glass shall be bivelled, grinded and machine finished to render smooth edges. All the exposed wood / wooden beadings shall be neatly finished with 2 coats of wood polish & stained to requird colour. All the glass surfaces shall covered on one side as per the design by frosted film of approved make.	30	SFT		
24	GLASS TOPS				
	Providing and fixing 8 MM THICK glass panes of required sizes (like 2'6" x 5 ft, 3'0" x 6'0" etc) with all edges neatly grinded & polished and fixed to the wall surfaces using D brackets. The glass shall be plain glass of Modi,saint Gobain,asahi make.	50	SFT		
25	GLASS SHELFS				
				•	•

🖟 ୬୦ಡಿಕೇಟ್ सिंडिकेट Syndicate

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

1	NII Rei. COHOD. F&E.DFJ.10340. 2024-2	uutcu	, 0) 10 / 1	 1	
26	Providing and fixing glass panes of required sizes (like 1 ft x 2 ft, 9" x 15" etc) with all edges neatly grinded & polished and fixed to the wall surfaces using D brackets. The glass shall be 12mm thk plain glass of Modi,saint Gobain,asahi make. NOTICE BOARD	12	SFT		
20	Providing and fixing notice board of size 6'x3' by using 19mm commercial block board with 1 ½" x ½" TW				
	beading alround. The inside surface shall be provided with 12mm thick soft board with fabric on the top. The TW beading shall be provided with two coats of polish over a coat of primer.	36	SFT		
27	FLAP GATE:				
	Providing & fixing in position Flap Gate made out of 19mm thick MR Grade Commercial plywood (KITPLY/UNIPLY make). The exposed surface to be covered with 1mm thick laminate of Approved shade & make. Edges are to be provided with teak wood beeding with polish, cost inclusive of all materials, labour charges, hinges etc.	1	NO		
28	PAINTING				
	Providing & applying 2 or more coats of ready mixed PLASTIC EMULSION paint (Premium Emulsion) of Asian paints or of equivalent make, over a coat of primer and touch up putty, after removing the old paint by thorough scraping and sand papering and preparing the surface to receive new paint coats by filling the cracks, holes with putty material or cracks filling material all complete. Six hours gap of draying time should be maintained between each coat of painting.	2700	SFT		
29	FLOOR MAT				
30	Providing and supplying vinyl mat of size 3ft x 2 ft durotuff make ALUMINIUM COMPOSITE PANELLING:	2	NO		
	Providing and fixing ACP for external wall cladding using 4mm thk ACP with aluminium foil thickness of 0.50mm on bothsides and 3mmthk polyethylene core of Euro Bond, Aluco Bond, Aluco panelmake. The panel should be of PVDF paint coating of Bank approved colour and shade, it shouldwithstand for atleast 15 years for fading (warranty certificate from the manufactrers is to be given for 15 years against fading, chalking. and delaminations etc) and to be properly fixed to the plywood backing. The Panels will be fixed on aluminium profiles framing fixed securely to the masonry wall. ACP should be fixed to the framing using suitable rivets /screws of suitable size. The rate should include all the material, labour, wastage, scaffolding etc. complete. Payment will be made on sq.ft. basis of actual finished area. Note- Combination of various shades should be used as per Bank design wherever necessary.	85.00	SFT		

NIT Ref. COHUB: P&E:DPJ:10548: 2024-25 dated 09.07.2024

31	Repairing, relamainating, changes of channels, locks, handles, hinges of existing counters tables and reusing as per architects layout & instructions etc complete	0	RFT	
32	Dismantling & Removing of existing tables, partitions false ceiling (if any) labour charges	1	LS	
	Total of Amount in figures (Excluding GST on works contract)			

Signature of Bidder with seal Page 20 of 20