

**AIR-CONDITIONING WORKS IN NEW & EXISTING PREMISES OF BAGALKOT RO**

Location of the Branch/Office	CANARA BANK RO BAGALKOT
Eligibility of the contractor	Eligible Air Conditioning Works Contractors empaneled with Circle Office: Hubballi
EMD	₹ 15,000/- Exemption Permitted under MSME Scheme on submission of relevant documents.
Address for submission of sealed tenders	Circle Office: Hubballi
Last date & time for submission of sealed tenders	<b>21.10.2024 up to 3:00 pm</b>
Date & Time of opening of sealed tenders	<b>21.10.2024 up to 3:30 pm</b>
Payment terms	As per IBA norms.
Time limit for execution of work	<b>30 days</b> from the date of work order
Defect liability period	12 months after completion or commissioning of work
Retention money towards defect liability period	3 % of final bill amount
Date of commencement of work	As per work order
Income Tax &/ other taxes	At applicable rate
Payment	After the completion of the work, as per procedure
Period for submitting final bill by contractor	Within one month from the date of virtual completion of the work
Liquidated damage for non-completion of work in time	<b>1% OF THE TENDERED AMOUNT per week and part thereof for the delayed period maximum of 10%.</b>
Rates quoted by bidder	<p>I. The quoted rate should be inclusive of Cost of materials, transport, loading , unloading charges, cost of installation, all taxes <b>(excluding GST)</b>, wastages, machinery, temporary works such as scaffolding, cleaning, overheads, profit, statutory expenses, incidental charges and all related expenses required for the completion of the work.</p> <p>II. Additional claims other than the quoted amount will not be entertained.</p> <p>III. The quoted rates shall be firm throughout the completion of the project</p>
Insurance	Falls under scope of contractor.
Validity of submitted tender	60 days from the opening of tenders

\* Conditions apply

The sealed tender must be dropped in tender box kept at the Circle Office within the above stipulated time. Tenderer / authorized representative are requested to be present at the time of opening. Canara Bank will not be bound to accept the lowest tender & reserves the right to reject any or all the tenders without assigning any reason thereof.

Signature of Bidder with seal

Page 1 of 12

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

To  
The Divisional Manager,  
P & E Section,  
Circle Office,  
Canara Bank,  
Hubballi - 580030.

Respected Sir,

Sub: Air Conditioning works at Premises of RO Bagalkot.

I/We hereby declare that I/ We have carefully gone through the conditions laid down in the Notice Inviting Tender, General notes, General Conditions of Contract, Special conditions, Schedule of approximate quantities and rates, Form of Agreement, General Specification, Approved manufacturers/natural source of materials Technical Specifications of schedule of quantities, and clearly understood all the same and on the basis of the same I/ We have quoted our rates in the Schedule of Quantities(i.e. BOQ) attached with the tender documents.

I / We have enclosed herewith a Demand Draft of \_\_\_\_\_Bank & No. \_\_\_\_\_ dated \_\_\_\_\_ favoring **Premises & Estate Section, Circle Office, Canara Bank, Hubballi** for ₹ \_\_\_\_\_ payable at Hubballi, towards E.M.D.

In the event of this Tender being accepted I/ We agree to enter into the agreement and submit the declaration on requisite non-judicial stamp papers as and when required and execute the contract according to your form of Agreement etc., in default whereof, I/ We do hereby bind my-self / ourselves to forfeit the aforesaid deposit.

I / We further agree to complete the work included in the said schedule of quantities within specified time from the date of the work order issued to commence the same.

I / We agree to pay all taxes(except GST), insurance charges as prevailing from time to time, on such items for whom same is to be levied by/ for the government, and the rates quoted by me / us are inclusive of all the same.

Once again knowing fully well the contents of this tender, I / We sign this tender on this \_\_\_\_\_Day of \_\_\_\_\_ month of 2022.

Signature of the Contractor with seal & date

Signature of Bidder with seal

Page 2 of 12

T: 08362-2239432/433 /434

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

**SPECIAL CONDITIONS & INSTRUCTIONS FOR THE GUIDANCE OF TENDERER**

1. The works at the branch/Office premises need to be executed duly taking care of the local bye laws/regulations of the local authorities like Police Dept, Water supply and Sanitary Board, Electricity Board, Central/ State Labor Commission etc. Necessary permissions, licenses, temporary connections if needed shall be obtained by the Contractor and Bank shall not be held responsible for any lapses.
2. The works shall be executed duly taking care of all safety measures and Bank shall be fully indemnified for any 3<sup>rd</sup> party claims, casualties, mishaps, loss of property etc. related to the undertaking & the execution of the subject work.
3. Tenderer are requested to submit the EMD in the form of crossed Demand draft only and EMD in any other forms shall be rejected.
4. Tenderer are expected to visit the site before quoting the rates and should satisfy themselves as to the nature and conditions of work facilities available etc.
5. The tenderer are required to examine the enclosed general plan, tender form and conditions mentioned in the tender.
6. The tenderer should quote the rates in the figures. The amount for each item should be worked out and the requisite totals shall be given. The total amount shall be written both in figures and words.
7. The rates quoted in the tender shall be for measured finished works and shall include all changes including cost of materials, transportation, freight charges etc. complete.
8. The work is to be completed within **30 days** from the date of issuing work order/confirmation from our side or handing over vacant possession of the site whichever is later.
9. The successful tenderer shall give all necessary personal attention to the work during the process of work and also until the expiry date of "Defects Liability Periods" which is **12 months** after the date of completion of the work.
10. The bank reserves the right to reject any portion of the work or material, which is, found unsatisfactory not up to the standard.
11. A retention amount of **3% of the bill amount** will be retained from the final bill and shall be paid to the successful tenderer after the defects liability period is over and upon the certification of the engineer.
12. Income tax deduction at prevailing / appropriate rates will be retained from each running bill which will be certified by the income tax authorities and a receipt will be given to the contractors.
13. GST will be decided as per the statutory requirements. Any other tax on materials, labor, services etc. in respect of this work shall be payable by the contractor and bank will not entertain any such claims.

NIT Ref. COHUB: P&E:DPJ:6925: 47:2024-25 dated 09.10.2024

14. If any additions and alterations are found necessary, the tenderer will have to do the same within the tendered rates with the prior approval of the bank.
15. The contractor shall employ adequate labor to complete the work within the scheduled time and shall make his own arrangements for housing his materials etc.
16. The contractor shall have to make his own arrangements to house his labor and staff for their services.
17. All tendered rates shall include for the cost of materials, labor, supervision, tools, plant, transportation, contingencies, duties, breakages, wastages, sundries, scaffolding, etc. complete.
18. All instruction regarding the execution of the work shall be received from the officials through consultant/architect only. Any other instructions issued directly to the contractor by anyone else shall not be binding on the bank.
19. The bank shall have the power to omit or cancel any item of work without assigning any reason whatsoever and no claim for compensation for damage will be entertained for such omissions and cancellation.
20. The contractor shall maintain satisfactory progress of work as well as maintain a desired level of workmanship. If in the opinion of the bank the progress is unsatisfactory and / or the workmanship is unsatisfactory then the bank shall take possession of the work **within 7 days** to that effect. The bank shall then complete the entire work and rectify all the defects at the contractor's cost and consequences.
21. In case the bank is not satisfied with the quality of materials used by the contractors, they reserve the right to direct the contractor to procure such materials supplied from agencies they deem fit.
22. The contractor is to be responsible for clearing any, all dirt and rubbish and superfluous materials as they accumulate and everything unnecessary and to leave the premises in a clean and orderly condition on completion and fit for occupation. No extra payment shall be made for doing this.
23. Any work which is not approved by the bank shall have to be removed within 24 hours from the time of order and shall have to be redone by the contractor at his own cost and this cost will be borne by the contractor.
24. No deviation whatsoever for any reason will be permitted, however, if any deviation becomes necessary, the same should be brought to the immediate notice of the bank and written approval must be obtained for such deviation before proceeding with the execution of work.
25. The bank has got the right to supply any materials required for the work and cost of materials so supplied will be deducted from the bills of the successful contractor.
26. The contractor shall be responsible for safe custody of his materials/materials issued to him by the bank till they are used for the work. He shall make his own arrangements for the safe custody and proper storage and preservation in sound condition till the same are actually used in the work.

Signature of Bidder with seal

Page 4 of 12

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

NIT Ref. COHUB: P&E:DPJ:6925: 47:2024-25 dated 09.10.2024

27. The tenderer shall extend full co-operation to the other contactor /agencies like electrical, air conditioning, Fire & CCTV, LAN etc. who are also working for the same project and co-ordinate with them in finishing the awarded work within the stipulated time given.
28. The contactor shall have a competent supervisor on the site for all the time.
29. For any new item the rate will be fixed by the bank as per prevailing fair market rate and labor which will be binding on the contactor.
30. In case the brand of materials mentioned in the tender is not available in the market, the alternate brand shall be used only after prior written approval of the bank.
31. The contactor shall be given a single electrical connection at work site. Electrical charges for consumption by the contactor will be charged separately by the bank, contractors have to provide sub-meter.
32. The successful tenderer shall not anticipate any financial help from the bank in the form of adhoc payment / advance for mobilizing and for starting the work.
33. The contractor should strictly adhere to the specifications and make of the materials, mentioned in the annexure. Any deviation will summarily reject the items of the work and not qualify for payment.
34. The successful tenderer shall be ready to carry out works between non-banking hours and even at nights and holidays.
35. The contractor should sign all the pages of the document and the same shall be submitted to us.
36. Acceptance of bids from the empaneled electrical works contractors is solely at the discretion of Bank
37. Acceptance of contractor for Labor laws
  - I. The successful tenderer / Contractor shall carefully and diligently implement the provisions of the Contract Labor Act & Contract Labor Rules.
  - II. The Bank shall be entitled to deduct from the Contract Consideration, any such amount which the Bank has to pay in accordance with the Contract Labor (Regulation & Abolition) Act 1971 and Workmen's Compensation Act, in the event of the Bank having to disburse compensation / effect any payment under the Contract Labor Acts / Rules.
  - III. Please note that as per rule 81(1) of Contract Labor (R&A) Rules, 1971, it is mandatory on the part of the Contractor to the display the notice containing the following details at prominent place at the work site.
    - (a) Rates of wages. (b) Hours of work. (c) Wage periods. (d) Dates of payment of wages. (e) Names & addresses of the Labor Inspectors having jurisdiction & (f) Date of payment of unpaid wages.
  - IV. The Contractor shall not engage any workmen for wages, less than the minimum wages prescribed under the notification issued by the Central Government.

Signature of Bidder with seal

Page 5 of 12

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

NIT Ref. COHUB: P&E:DPJ:6925: 47:2024-25 dated 09.10.2024

- V. The contractor should follow all labor laws/guidelines laid down by central /state government from time to time.

**37. Preventive and Breakdown Maintenance during Warranty Period:**

- i. All the Air-conditioners covered in this contract have to be maintained as per the standards of the original manufacturing company during the warranty period.
- ii. The warranty would be on-site and comprehensive in nature and back to back support from the OEM. The vendor will warrant all the spares against defects arising out of faulty design, materials and workmanship etc. during the period of warranty.

CERTIFICATE

I / WE HAVE READ, FULLY UNDERSTOOD THE ABOVE MENTIONED REGULATIONS OF LABOUR LAWS/GUIDELINES AND ACCEPT THE SAME IN TOTO. I ALSO UNDERTAKE TO FOLLOW ALL LABOUR LAWS/GUIDELINES LAID DOWN BY CENTRAL /STATE GOVERNMENT FROM TIME TO TIME & INDEMNIFY THE BANK AUTHORITIES.

**ANNEXURE I (TO BE MANDATORILY FURNISHED)**

1.	Name of the Contractor under the Contract Labor (Regulation and Abolition) Act, 1970 (37 of 1970) (if applicable)	
2.	LIN / PAN No	
3.	Email Id	
4.	Mobile No.	
5.	No. & date of Certificate of Registration/ License*	
6.	Name of Person in charge of work	
7.	LIN / PAN No. of the person in charge of work	
8.	Email Id of the person in charge of work	
9.	Mobile No. of the person in charge of work	
10.	The Nature of work involved & the facilities, including any plant & machinery provided in the case of a building or other construction work	

\* Please strike off whichever is not applicable

Signature of Bidder with seal


Page 6 of 12

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

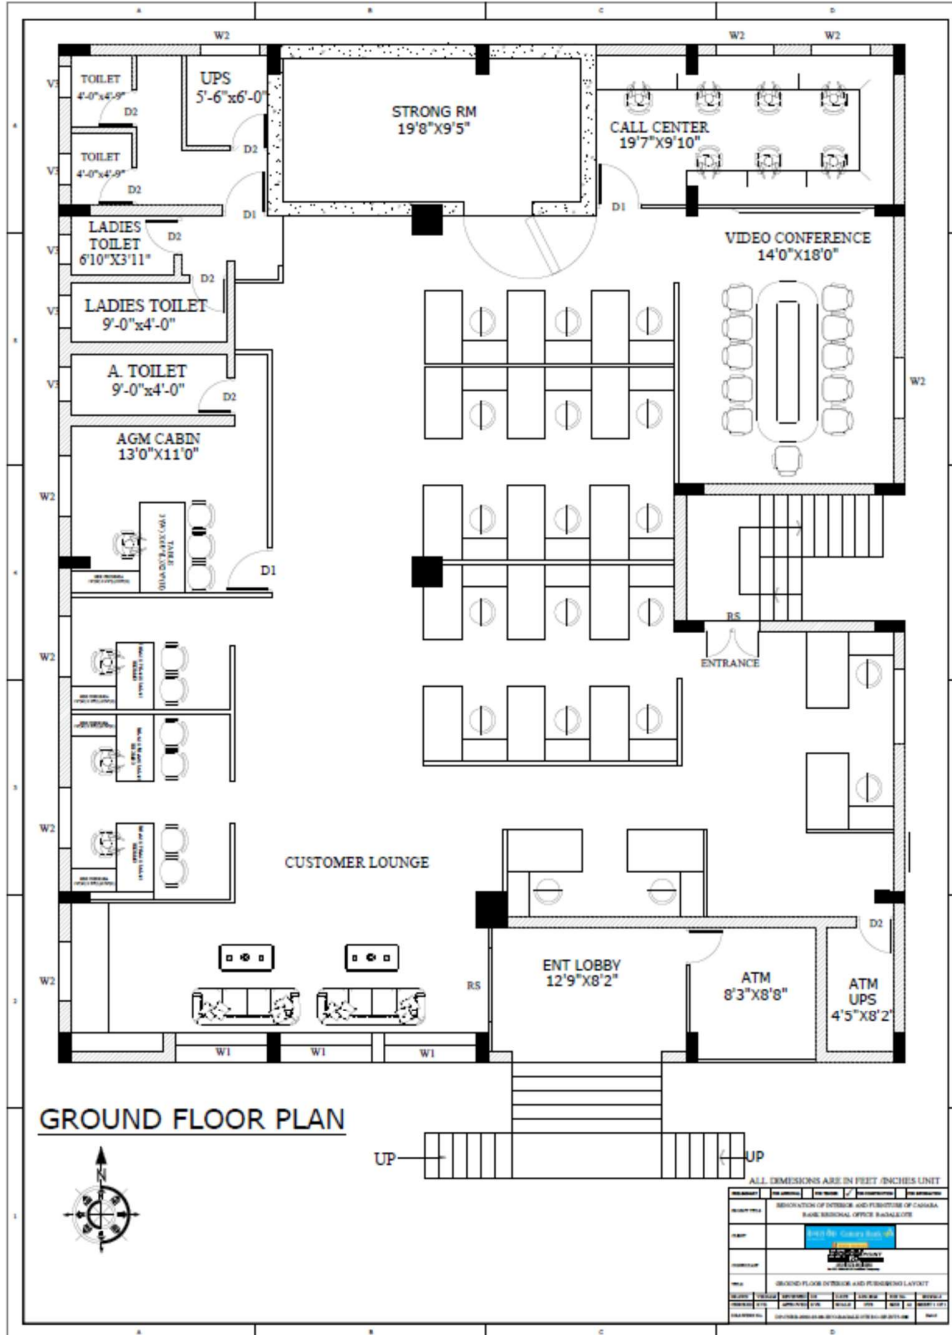

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,


T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohuh@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: P&E:DPJ:6925: 47:2024-25 dated 09.10.2024

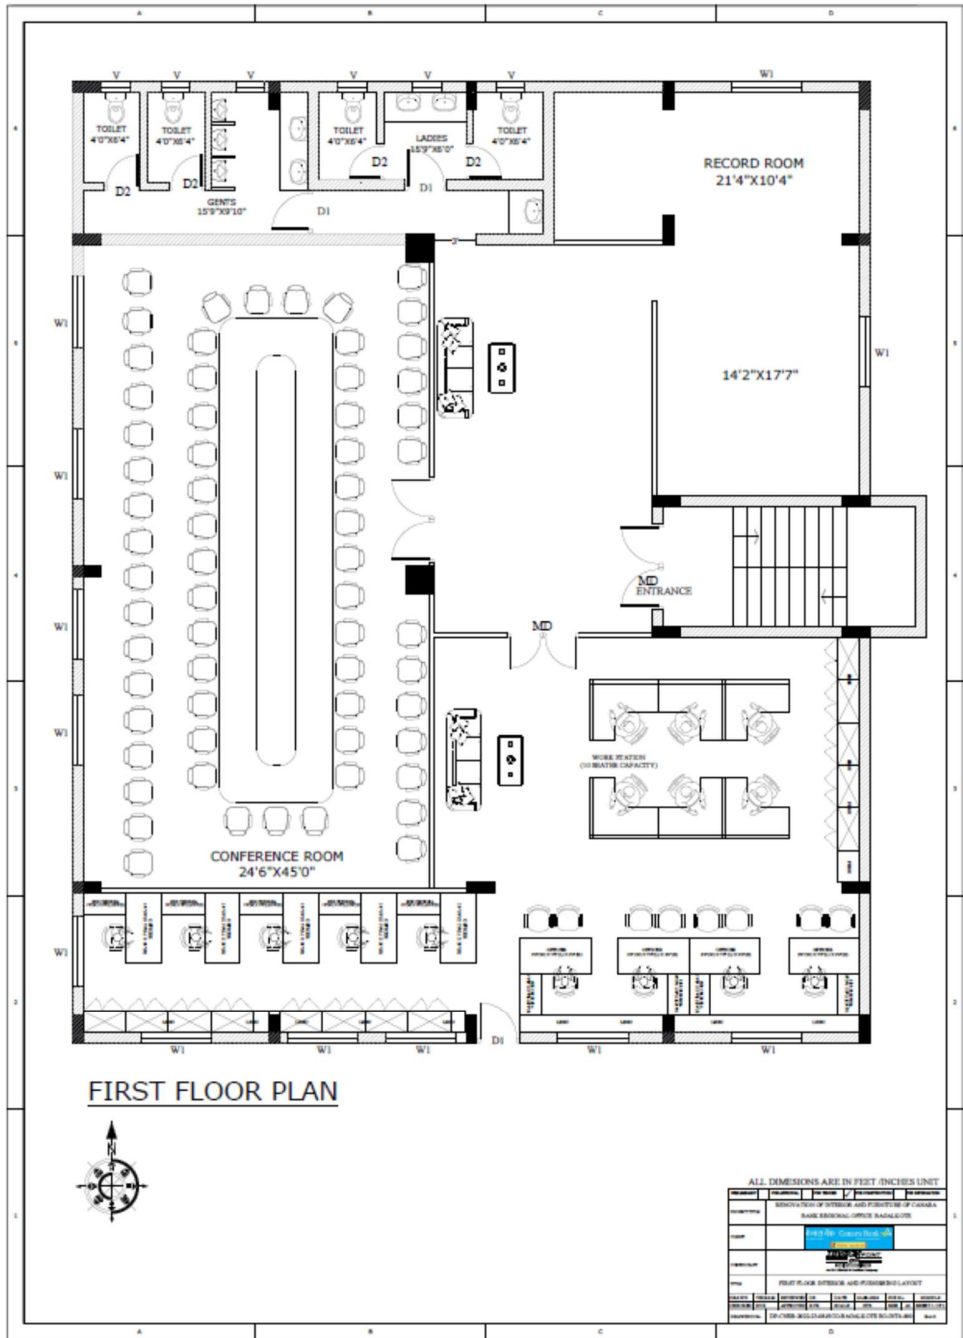

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

T: 08362-2239432/433 /434

E:pecohub@canarabank.com



**PART A - AIR-CONDITIONING WORKS OF FIRST FLOOR**

Air-conditioning System (Inverter Model/ 5 Star - Wall mounted Split Unit/ Ceiling Suspended Cassette unit) Equipment Make - Voltas//Blue star/Daikin/Carrier/Mitsubishi/- 5 star split & 5 star or Equivalent energy saving latest model - cassette (inverter units) with copper condenser All the work of Drain pipe/copper pipe/cable shall be properly supported by clamps from the slab.

**HIGH SIDE WORK (A)**

Item No.	DESCRIPTION OF WORK	UNIT	QTY	RATE(INR)	AMOUNT(INR)
1	Supplying, erection, testing and commissioning following wall mounted Split/ Roof mounted cassette units of approved make with cordless remote complete with all necessary fittings duly insulated with 9 mm thick nitrile rubber pipe insulation with (evaporator coil - copper only), fan and fan motor, machine control panel improved Refrigerant Joints, .Air conditioners shall be fitted with hermetically sealed type suction cooled reciprocating or discharge cooled rotary compressor or scroll compressor. Compressor unit operating on R-22/R-410. All complete as per drawing, approval and instructions of the Employer (Rates to be inclusive of copper refrigerant pipe with insulation and Drain pipe up to 5 Mtr. length).				
a	2.0 TR wall mounted split unit (Minimum 5-Star rating inverter type) including all necessary fittings and mountings as specified by the manufacturer.	Nos.	3.00		
b	2.0 TR Cassette type unit with 4 way/ round air flow including all necessary fittings and mountings as specified by the manufacturer (Three phase). (5 star or Equivalent energy saving latest model Inverter Type)	Nos	5.00		
<b>HIGH SIDE WORK SUB TOTAL AMOUNT( Excluding GST)</b>					

**LOW SIDE WORK**

1	<b>EXTRA REFRIGERANT PIPING</b>				
	Supplying and laying of Extra copper refrigerant piping with nitrile rubber pipe insulation, both of size as specified by the manufacturer suitable for 1.0 TR/ 1.5/2.0 TR Split type AC and 2.0/3.0 TR Cassette AC (From Indoor to outdoor Units) Beyond 3 M.				
a	For 1.0 TR/ 1.5/2.0 TR Cassette Unit	Mtr.	150.00		
2	<b>DRAIN PIPING</b>				
	Providing and fixing drain piping up to drain as directed by the engineer in charge with all accessories e.g., elbows, unions, sockets, reducers, reducing tees, nipples etc. Complete job including cutting chiseling in walls, fixing with				

Signature of Bidder with seal

Page 9 of 12

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: P&E:DPJ:6925: 47:2024-25 dated 09.10.2024

	GI clamps, floor and making good of all chases/cuts etc. and discharging the drain into a floor trap/ gully as per site conditions with insulation, both as specified by the manufacturer.				
a	25 mm dia PVC drain pipe for Split AC	Mtr.	150.00		
3	<b>AUTOMATIC VOLTAGECONTROLLER</b>				
	Stabilizer shall be Automatic version with copper coil transformer and the voltage selection range shall be minimum depending on lowest peak recorded average in a month. Precise output voltage range (130V-170V to 240V -270 V). Ensure the rating of Stabilizer shall be in accordance with max rated power of ACs considering instantaneous peak load fluctuation.				
	Providing and fixing Stabilizer with 3-4 step relay and input voltage range of 130-270 V and output to be 230- 240 V (Blue bird/ Logic state/ Inline/ V-Guard/Equivalent Reputed Make) (copper winding).				
a	3 KVA (For 1.0/ 1.5 TR Split AC)	Nos.	8.00		
4	<b>AIR-CONDITIONERS STAND</b>				
	<b>Powder coated readymade stands</b>				
a	For 1.5TR Hi Wall split units	Nos.	8.00		
5	<b>ELECTRICAL CABLES</b>				
	Suitable IS/BIS standard Cable of 1.1-2.2 KV, Multi strand, FRLS 2- 4 C / 1.5/2.5 -6.0 Sqmm) as per design requirement of Peak load calculation of specific ACs system installed at site with 1"/1.2"/2" PVC conduit pipe between indoor/outdoor unit				
a	Supplying and laying of Extra Electrical interconnecting control cable from indoor to outdoor of size as specified by the manufacturer suitable for 1.0 TR/ 1.5/2.0 TR Split type AC.	Mtr.	70.00		
b	Supplying and laying of Extra Electrical interconnecting control cables from indoor to outdoor of size as specified by the manufacturer suitable for 2.0/ 3.0 TR Cassette type AC.	Mtr.	55.00		
	<b>LOW SIDE WORK SUB TOTAL AMOUNT( Excluding GST)</b>				
	<b>PART A - GRAND TOTAL ( Excluding GST)</b>				

**PART B - AIR-CONDITIONING WORKS OF GROUND FLOOR**

Air-conditioning System (Inverter Model/ 5 Star - Wall mounted Split Unit/ Ceiling Suspended Cassette unit) Equipment Make - Voltas//Blue star/Daikin/Carrier/Mitsubishi/- 5 star split & 5 star or Equivalent energy saving latest model - cassette (inverter units) with copper condenser All the work of Drain pipe/copper pipe/cable shall be properly supported by clamps from the slab.

**HIGH SIDE WORK**

Item No.	DESCRIPTION OF WORK	UNIT	QTY	RATE(INR)	AMOUNT(INR)
----------	---------------------	------	-----	-----------	-------------

Signature of Bidder with seal

Page 10 of 12

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohuh@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: P&E:DPJ:6925: 47:2024-25 dated 09.10.2024

1	Supplying, erection, testing and commissioning following wall mounted Split/ Roof mounted cassette units of approved make with cordless remote complete with all necessary fittings duly insulated with 9 mm thick nitrile rubber pipe insulation with (evaporator coil - copper only), fan and fan motor, machine control panel improved Refrigerant Joints, .Air conditioners shall be fitted with hermetically sealed type suction cooled reciprocating or discharge cooled rotary compressor or scroll compressor. Compressor unit operating on R-22/R-410. All complete as per drawing, approval and instructions of the Employer (Rates to be inclusive of copper refrigerant pipe with insulation and Drain pipe up to 5 Mtr. length).				
2	1.0 TR Cassette type unit with 4 way/ round air flow including all necessary fittings and mountings as specified by the manufacturer (Three phase). (5 star or Equivalent energy saving latest model Inverter Type)	Nos	1.00		
<b>HIGH SIDE WORK SUB TOTAL AMOUNT( Excluding GST)</b>					
<b>LOW SIDE WORK</b>					
1	<b>EXTRA REFRIGERANT PIPING</b>				
	Supplying and laying of Extra copper refrigerant piping with nitrile rubber pipe insulation, both of size as specified by the manufacturer suitable for 1.0 TR/ 1.5/2.0 TR Split type AC and 2.0/3.0 TR Cassette AC (From Indoor to outdoor Units) Beyond 3 M.				
a	For 1.0 TR/ 1.5 TR Cassette Unit	Mtr.	20.00		
2	<b>DRAIN PIPING</b>				
	Providing and fixing drain piping up to drain as directed by the engineer in charge with all accessories e.g., elbows, unions, sockets, reducers, reducing tees, nipples etc. Complete job including cutting chiseling in walls, fixing with GI clamps, floor and making good of all chases/ cuts etc. and discharging the drain into a floor trap/ gully as per site conditions with insulation, both as specified by the manufacturer.				
a	25 mm dia PVC drain pipe for Split AC	Mtr.	10.00		
3	<b>AUTOMATIC VOLTAGECONTROLLER</b>				
	Stabilizer shall be Automatic version with copper coil transformer and the voltage selection range shall be minimum depending on lowest peak recorded average in a month. Precise output voltage range (130V-170V to 240V -270 V). Ensure the rating of Stabilizer shall be in accordance with max rated power of ACs considering instantaneous peak load fluctuation.				
	Providing and fixing Stabilizer with 3-4 step relay				

Signature of Bidder with seal

Page 11 of 12

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: P&E:DPJ:6925: 47:2024-25 dated 09.10.2024

	and input voltage range of 130-270 V and output to be 230- 240 V (Blue bird/ Logic state/ Inline/ V-Guard/Equivalent Reputed Make) (copper winding).				
a	3 KVA (For 1.0/ 1.5 TR Split AC)	Nos.	1.00		
4	<b>AIR-CONDITIONERS STAND</b>				
	<b>Powder coated readymade stands</b>				
a	For 1.5TR Hi Wall split units	Nos.	1.00		
5	<b>ELECTRICAL CABLES</b>				
	Suitable IS/BIS standard Cable of 1.1-2.2 KV, Multi strand, FRLS 2- 4 C / 1.5/2.5 -6.0 Sqmm) as per design requirement of Peak load calculation of specific ACs system installed at site with 1"/1/2"/2" PVC conduit pipe between indoor/outdoor unit				
a	Supplying and laying of Extra Electrical interconnecting control cable from indoor to outdoor of size as specified by the manufacturer suitable for 1.0 TR/ 1.5/2.0 TR Split type AC.	Mtr.	10.00		
b	Supplying and laying of Extra Electrical interconnecting control cables from indoor to outdoor of size as specified by the manufacturer suitable for 2.0/ 3.0 TR Cassette type AC.	Mtr.	10.00		
6	SHITING AND RELOCATING EXISITING AC	NOS	3.00		
	<b>LOW SIDE WORK SUB TOTAL AMOUNT( Excluding GST)</b>				
	<b>PART B - TOTAL ( Excluding GST)</b>				
	<b>GRAND TOTAL OF PART A + PART B (EX GST)</b>				

Signature of Bidder with seal

Page 12 of 12

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com